

INTELLIGENT DIN RAIL OFDMA PLC MODEM



power lines, resulting in extremely reliable and robust communications in a Low-Voltage power network. The DIN Rail PLC modem utilizes the industry-leading gridComm GC2200 integrated circuit, an OFDMA (Orthogonal Frequency Division Multiple Access) Power Line Communication Transceiver.

Benefits of GC9200

The GC9200 has 18 independent channels capable of operating with up to 54 carrier frequencies over a wide frequency range of 5 KHz to 500 KHz. The modem is ideal for use in noisy environments where it is effective in tackling signal variations that are commonly present in power line applications due to signal attenuation, impulsive noise, and changes in line impedance. The DIN Rail PLC modem is ideal for applications such as Industrial Automation, Alternative Energy, M2M and other applications that require highly reliable power line communications.

Auto Network Applications

The GC9200 is optimized for network topologies such as star or tree configurations.

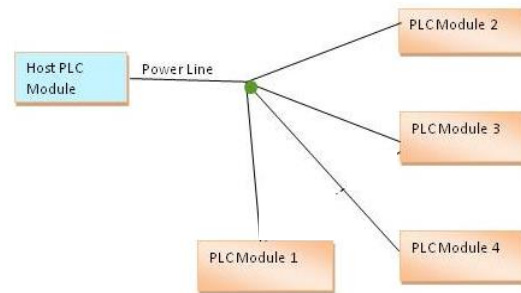


Figure 1 - "Star"-Shaped Network

Figure 1 shows a simple PLC network system connected with five modems installed in a "Star" configuration on the same power line. Figure 2 shows a "Tree" network.

Overview

The gridComm GC9200 is a DIN Rail Power Line Communication (PLC) modem. It automatically configures and self-adapts to the varying conditions on

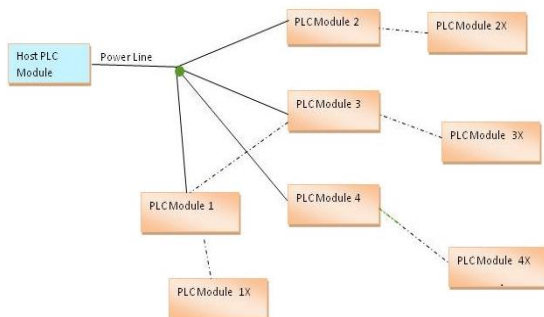


Figure 2 - "Tree" Structure

Point-to-Point Application

GC9200 also works in Point-to-Point applications where the user wishes to create a data communications path between two points without the need for a communications cable. Two PLC nodes are connected on the same power line as in Figure 3.

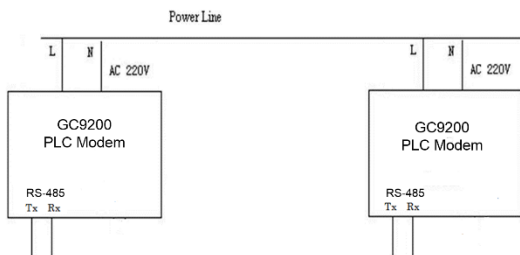


Figure 3 - Point-to-Point Communications

Features and Specifications

- 18 independent channels operating with up to 54 out of 100 pre-installed carrier frequencies between 5 kHz to 500 kHz.
- 3QPSK, 3BPSK, or 1BPSK modulation schemes with up to 18 levels of redundancy
- Raw data rates between 1.22 Kbps to 7.32 Kbps depending on power line conditions
- Supports RS485 via a transparent protocol
- 32-bit addressing scheme
- Four operation modes: Point-to-Point, Simple Broadcast, Auto-Routing, and Broadcast-Routing
- One master node supports up to 240 slave nodes in Auto-Routing and Broadcast-Routing modes
- Scan Frequency tool to scan for best 18 carrier frequencies based on RSSI and Received
- Success Rate for up to 8 nodes
- Noise Indicator tool to detect noise level for selected frequency channels
- Debug tool to test success rate of communication links
- Options for operation on CENELEC A, CENELEC B, CENELEC C, CENELEC D, FCC or ARIB bands.
- Support user packet size of up to maximum of 512 bytes
- Distance: Up to 3km- the actual distance depends on power line conditions
- Connects directly to Low-Voltage AC power line
- Interface: RS485, no external interface converter needed
- Input power supply: Options for 120V 60Hz and 220~240V, 50/60 Hz, 100mA
- Preset Serial COM Port settings: 115200 Baud rate, No Parity Bit, 8 Data Bit and 1 Stop Bit
- Rx Sensitivity: -75 dBm
- Operating Temperature -40°C to +85°C
- Standards: CE , FCC
 - EMC: test as per EN 50065-1, EN 55022, EN 55024, EN 61000-3-2, EN 61000-3-3, EN 61000-6-2 & EN 61000-6-4 FCC Part 15B
 - Safety: EN 60950
 - Euro RoHS
 - IP 40
- Size in mm: 71 L x 54.5 W x 75 H Weight: 310 g
- Flame Retardant ABS casing with DIN Rail mounting

Contact Information

For more information regarding the *GC9200 DIN Rail PLC Module* including pricing and ordering, please contact: gridComm Pte Ltd

www.gridComm-plc.com

sales@gridComm-plc.com

Dimensions of DIN Rail PLC Modem

